
JIELI

TELESCOPIC LOADER JL2500





QINGZHOU JEILI MACHINERY CO.,LTD

**ADDRESS: NO. 266 YINGZHOU ROAD, NAOSHAN ECONOMIC DEVELOPMENT ZONE,
SHAOZHUANG TOWN, WEIFANG CITY, SHANDONG ,PROVINCE , CHINA**

Mobile :+8615265652947

What's app:+8615265652947

Email :lilysong@qzjeli.com

Website:www.qzjeli.com

TELESCOPIC LOADER JL2500

Advantage

- With the articulated pendulum joint, all four wheels maintain traction even on uneven terrain. This increases the productivity of the machine and gives the driver optimal control.

The optimal ratio of articulation and oscillation angle ensures a high level of grip on the ground. This makes the machine easy to maneuver.

Even in confined spaces, there is no collision between the front and rear of the machine.

- The front and rear sections can swing independently of each other. This allows the driver to react sensitively to any unevenness. This increases comfort and creates a safe driving experience

- High-strength steel plates are more sturdy and durable and Yield strength 1000 megapascals. inner lining plate bent at 90 degrees with 90° iron sheet for convenient adjustment.

- Graphite bushings are wear-resistant and do not require grease, increasing service life.

Made of 40Cr material, with quenching and tempering + medium frequency treatment, it is more sturdy and durable than ordinary pins.


Standard Configuration

Changchai4G33, 70 KW, the big cab like the pic, rear open engine cover, 16/70-20 tire,4-HYDRAULIC joystick, Electric quick hitch, forward and rear, high and low speed ,all be controlled by electric ,rearview camera, ELECTRICAL TELESCOPIC ARM, electric 4WD, Hydraulic torque converter drive (2 forward, 2 backwards), full automatic, standard bucket (1.1m³), adjustable instrument, Adjustable seat, disc brake system, engine preheating heater, bucket can be level automatic, waterproof plug-in, back sound, radio, fan, extinguisher, window hammer, 220v engine heater ,lifting height with fork is 5000mm, dump height is 4300mm, speed30km/h, The tipping angle of the bucket is 40 ,lifting capacity is 2500kgs , operation weight is 6700kgs,Free service spare parts

Standard Configuration

A/C, loading dumper, center Lubrication system, iron cast rear counterweight, Yunei EURO5 ,Yuchai EURO 5,Yarman Euro5,Cummins EPA4,multifunction attachments ETC

Technical Parameter

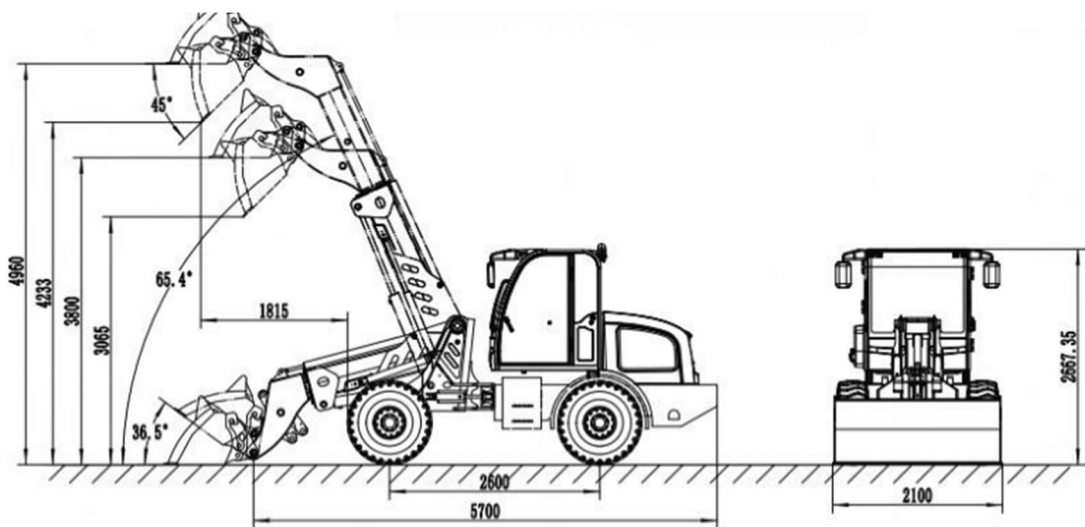

Bucket capacity 1.1m³

Loading capacity 2500kgs

Max driving Speed 40km/h

Maximum dump height 4350mm

Tire 16/70-20

Net weight 6700kgs

Max lift height 5000mm

minimum turning radius (outside of wheels) 4400mm

service brake Air-assist hydraulic brake, disc brake

QINGZHOU JIELI MACHINERY CO.,LTD